


Tournament Schedules

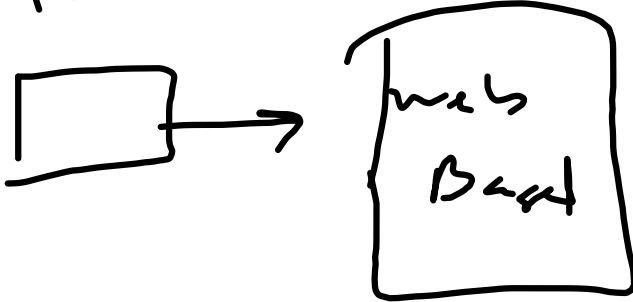


Single repository
call/return
call structure

Profile-driven

Web Notes

web based

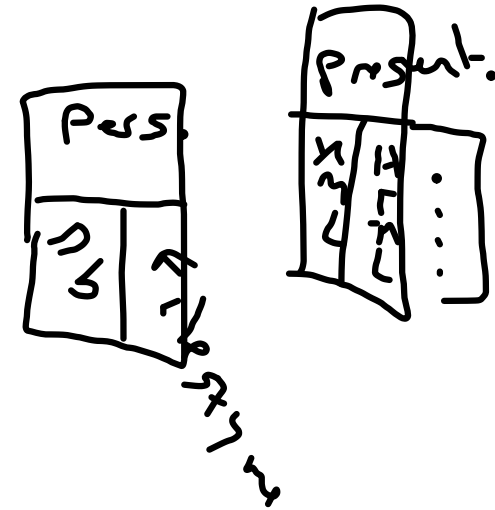


Machete

Signal Language Tutorial

Data
Repos.

Web-based
Structure


Event-driven

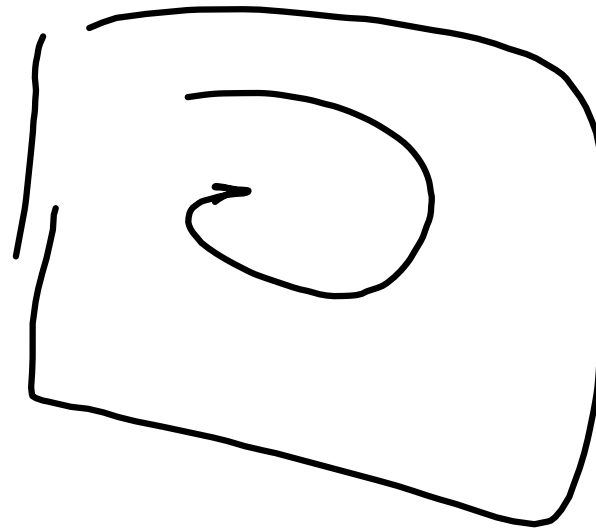


Package Repository

Repository
Application

meta
source

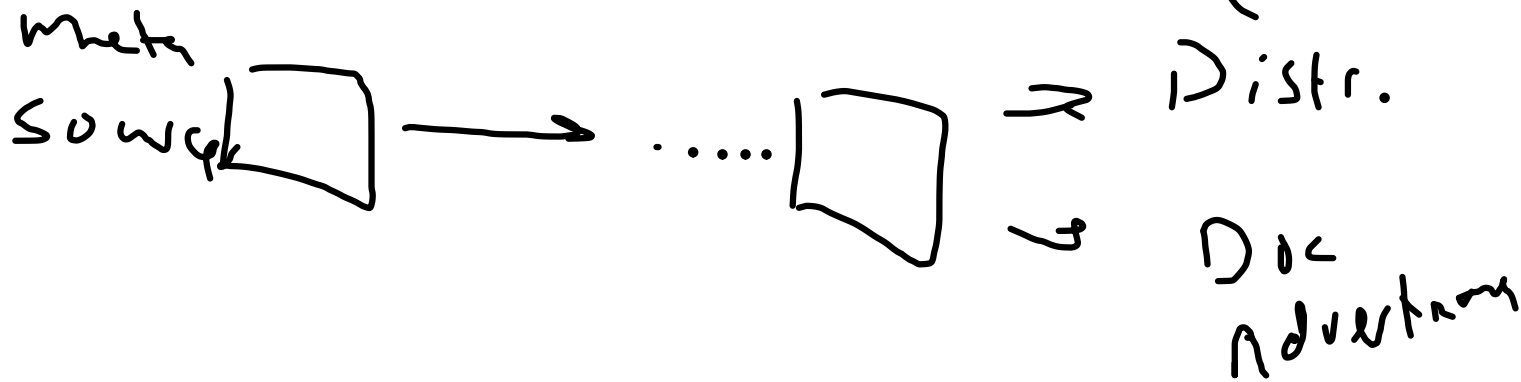

.....



(rpm)
Distr.
Doc
Advertisement

Milo — Video feeds

[peer-to-peer]
formatting

Identify a system where data
is non-centralized

maintain

Design → OO Design

Bowling Problem

↳ Input
(Accuracy)

~~Player~~

Frame

~~Pins~~

~~↳ how
many
knocked
down
how many
strikes~~


~~League~~

Game

Lane

Ball/Throw

~~Shops~~

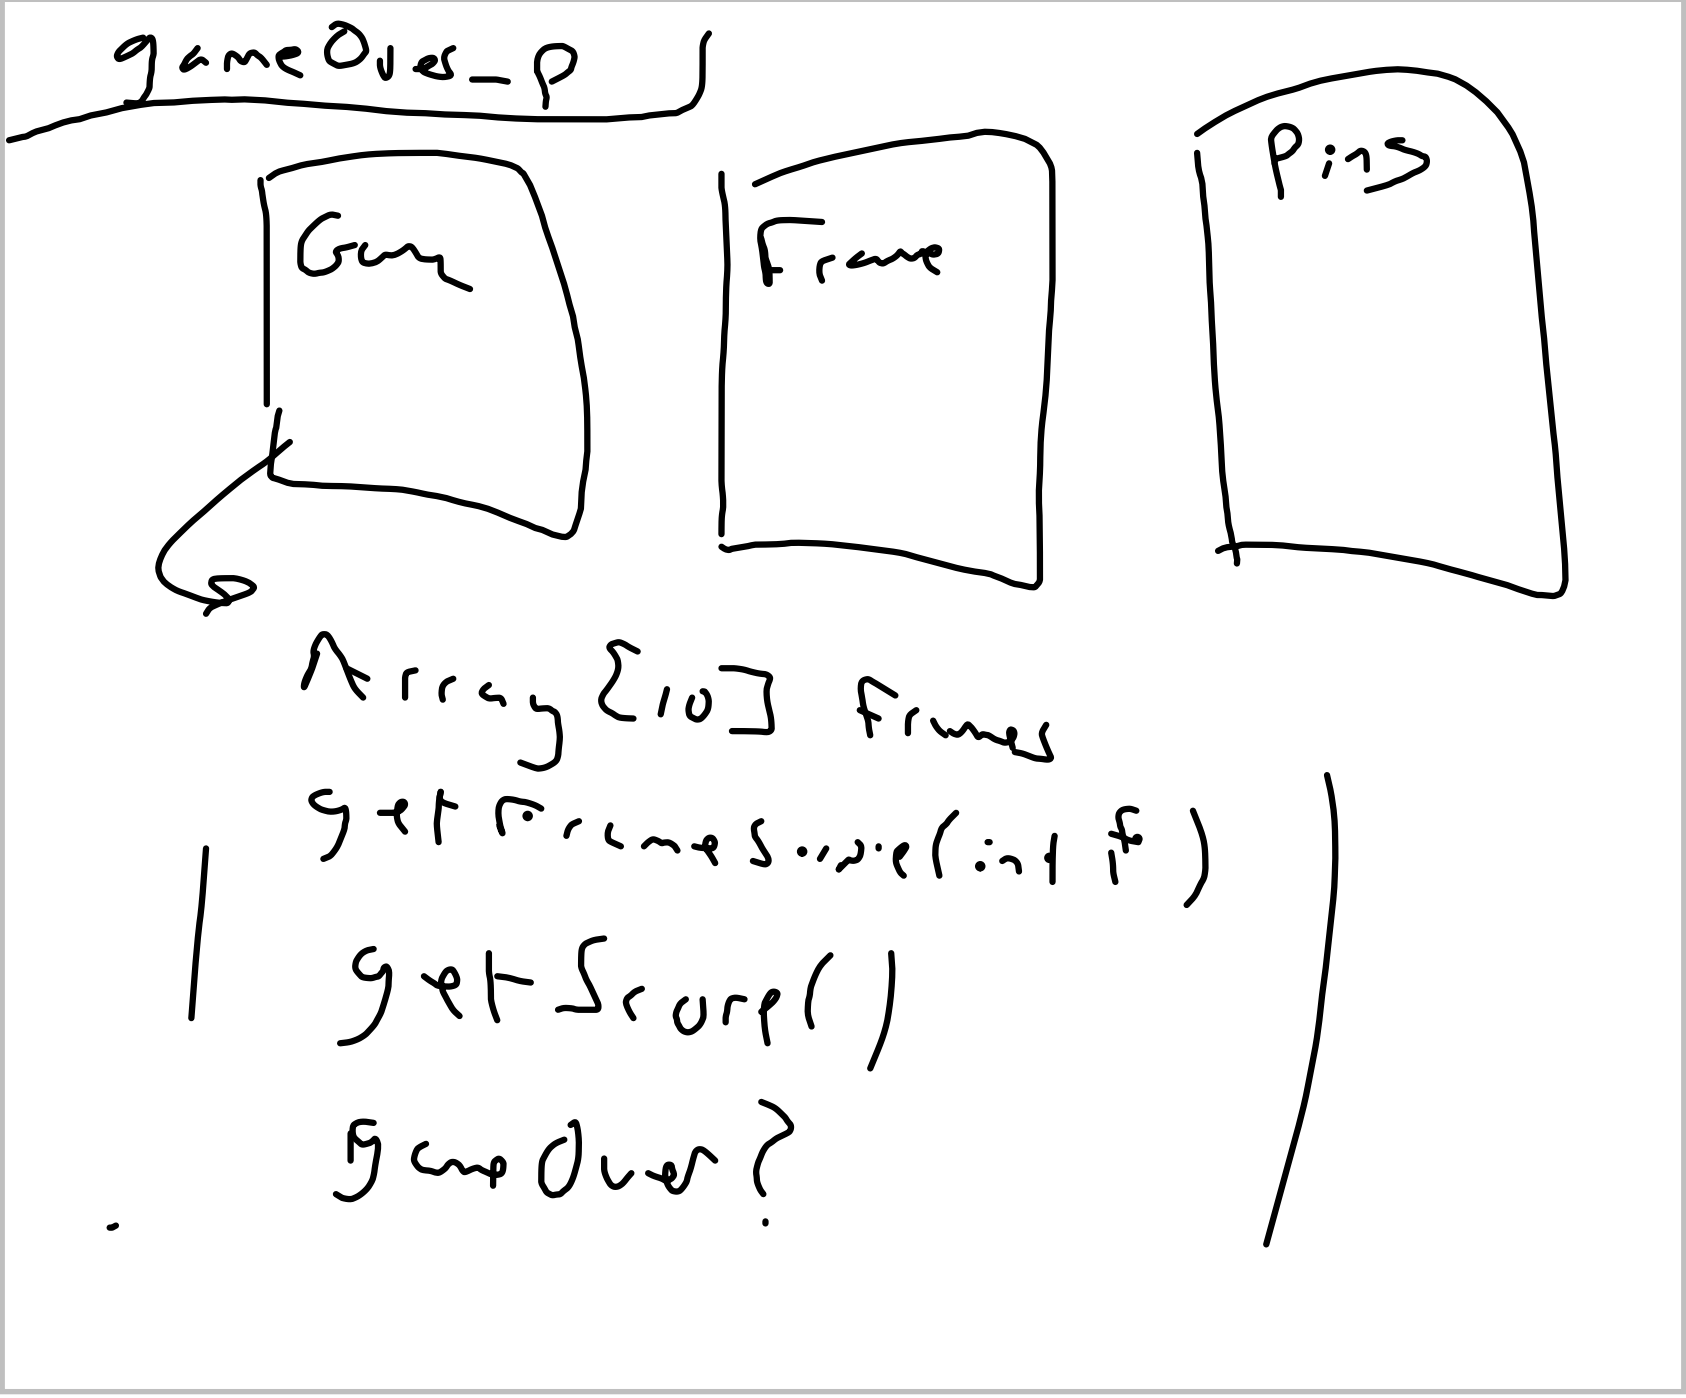


Frame

Array[3] pins




didSpare?

didStrike?

.....
Score()

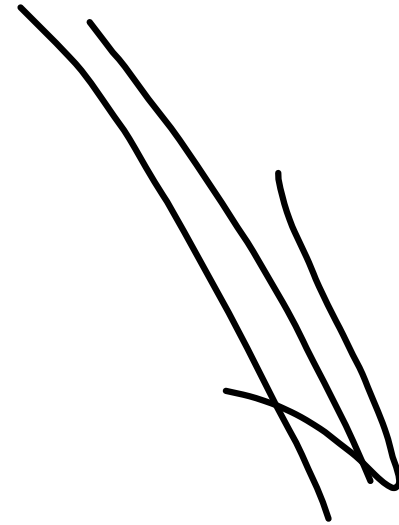

Test. driver design

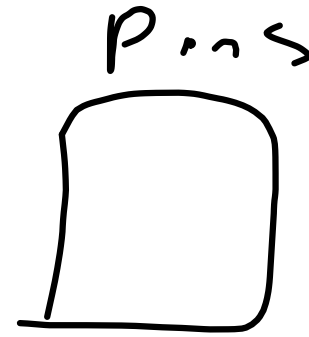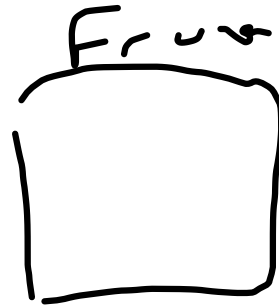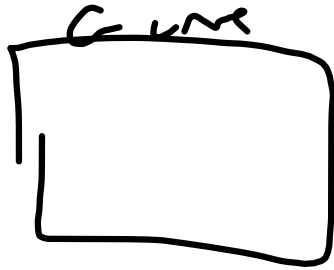

getKnockedDownCount()

DRY \Rightarrow Don't repeat
yourself

YAGNI \Rightarrow You ain't gonna
need it


KISS \Rightarrow Keep it
Simple
Stupid

```
int pay; // pay as a whole  
// dollar  
// amount  
public boolean gender();  
//
```


~~/*~~ @param n - this is name

```
public void setName (String n) {
```


Board (min)

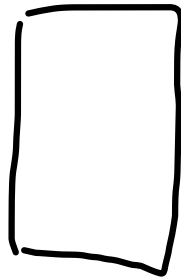

9x7

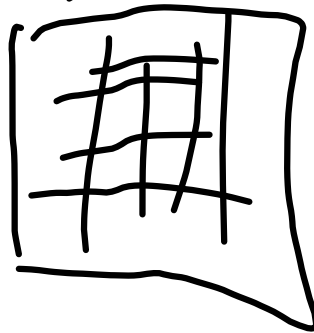

8x10

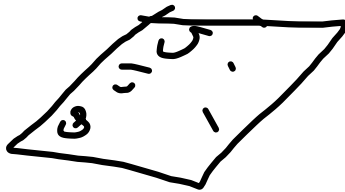

10x10